

Assembly Instructions

04L/04R/04X Rocking Loveseat Latch Bracket System Assembly


Tool Required: T-30 Torx Driver
Straight Screwdriver

Assembly


1. Place the furniture in the desired location. The recliners must be positioned 16" away from the wall for reclining clearance.
2. Proceed to Step 8 when joining a loveseat *without* a console.
3. The parts bag is located in the bottom drawer of the console, and contains (4) bushings and (2) truss head screws. The parts bag may also contain (4) adjustable glides and (4) jam nuts.
4. If applicable, screw one jam nut all the way down on each adjustable glide. Fasten the four adjustable glides in the t-nuts located in the bottom rails of the console.
5. Place two bushings on each truss head screw. It is important to use two bushings on each screw to prevent interference with the drawer assembly.
6. Use a T-30 torx driver to fasten each truss head screw, with bushings, in the t-nut holes on the left side of the console. The upholstery is cut at the t-nut hole locations.
7. Place the console next to the right side (sitting) rocker recliner. Move the console approximately 4" forward of the rocker recliner. Push the console back until the truss head screws on the rocker recliner are engaged in both the front and rear latching brackets on the console.
8. Place the left side (sitting) rocker recliner next to the unit with the truss head screws, either the right side (sitting) rocker recliner or the console. Move the left side (sitting) rocker recliner approximately 4" forward of the unit with the screws. Push the rocker recliner back until the truss head screws are engaged in both the front and rear brackets on the rocker recliner.
9. Adjust the glides on the console to level the unit, if necessary. Turn clockwise to lower and counterclockwise to raise.

Please read through all instructions prior to beginning the assembly.


Right Side (Sitting) Rocker Recliner

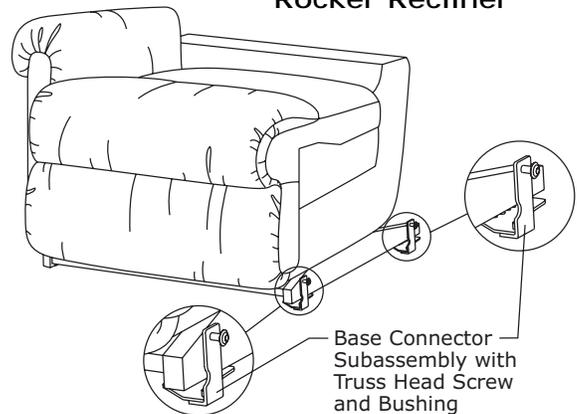

Console

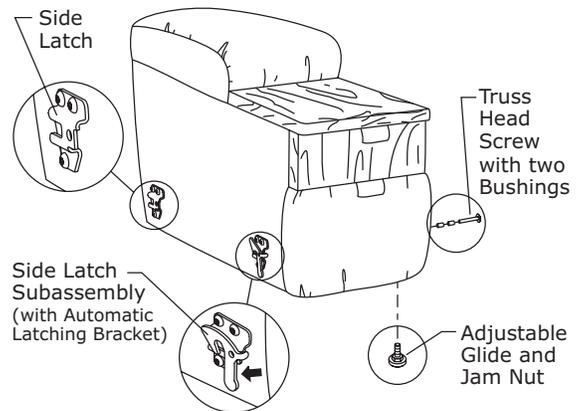

Left Side (Sitting) Rocker Recliner

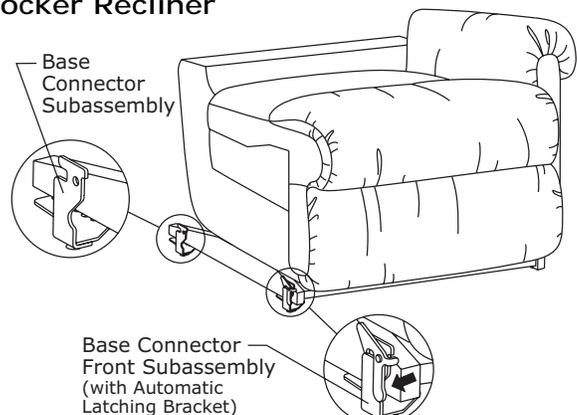

Assembly Instructions

⚠ WARNING – Risk of injury:


Do not operate the unit until the back is installed and locked.

NOTICE – Risk of product damage:


The purpose of the latch bracket system is to connect the units and prevent them from being separated. The latch bracket system does not provide adequate structural support for the movement of latched units. Do not move the units while latched together, damage may occur.

10. Install the backs.

- Align the brackets on the back with the brackets on the body. The back brackets may be located on the outside or inside of the back assembly.
- Lower the back onto the body, making sure the back and body brackets are completely engaged.

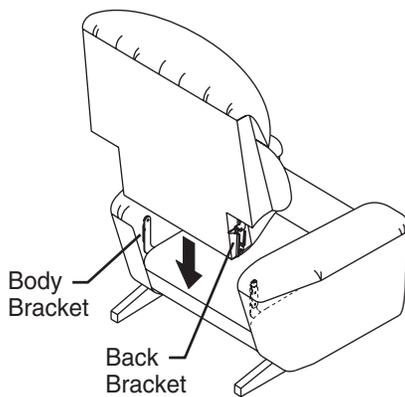


- Push the locking levers down to lock the brackets.

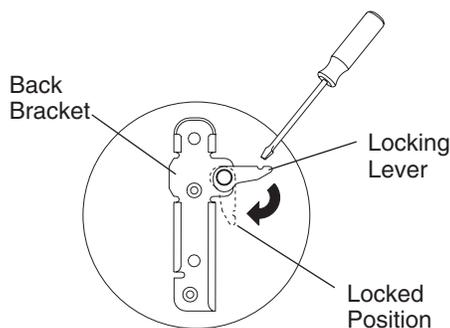


- If you are unable to install the back properly, contact your La-Z-Boy® dealer for assistance.

11. The units must be disconnected before moving the loveseat. To disconnect the units apply pressure to the swing arm on the Automatic Latching Bracket, which opens the locking mechanism, and slide the unit forward.



Side Latch Subassembly (Console)



Base Connector Front Subassembly (Left Side Sitting Rocker Recliner)